



KALSTEIN FRANCE S. A. S.,

ADD / Optimum Business Center,
450 Rue Baden Powell, 34000
Montpellier – France.

Email / sales@kalstein.eu

Fax / +33 4 67 15 88 49

Tel / +33 7 68 07 60 17

Web / www.kalstein.eu



Focus On Autoclave

PRODUCT


Introduce



The models YR03385C and YR03385B are class B autoclaves in complete compliance with European Standard En13060, with more bigger chamber than KALSTEIN 0381-0384 series sterilizers, provide the sterilization solution for bigger size instruments or more loads. KALSTEIN YR03385-0 and YR03385-2 series autoclave are special popular for sterilizing the instruments kit of dental implants, as well as widely used in the fields of medical, laboratory and so on.

KALSTEIN STERILIZERS

4 major feature



Efficient

KALSTEIN uses an intelligent systems that saves time and energy by providing a fast and complete sterilization cycle with full drying and a convenient operation.

Safety

KALSTEIN series equipped with automatic electric door locking with multi protection system that utilizes machanical and electronic safety mechanisms for pressure, also has temperature and electrical current protection. KALSTEIN also uses a large number of high quality imported parts that have a proven records of reliability and ensures the users safety.

Quietness


KALSTEIN series use the vacuum pump from Germany, with high efficient sterilization result and very quiet working.

Carefulness

KALSTEIN pay attention to the detail. We focus on design a perfect sterilizer with fashion design, fine workmanship, high efficient sterilization, easy operation and also simplicity of maintenance.

Class B Sterilizer

Process Curve

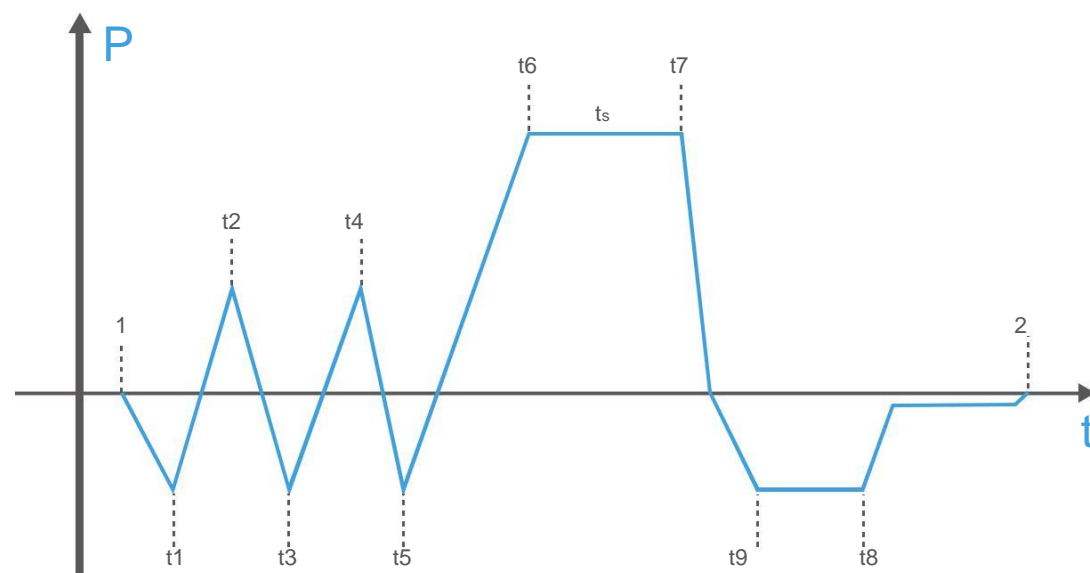

Introduce

SPECIFICATION

Full metal case, durable strength.

10

The built-in frame dust filter ensures constant performance levels, reduced maintenance costs and longer service intervals.



09

Medical grade stainless steel chamber, with high level surface treatment.



Distinctive instruments racks design, special for loading dental implants kits or other higher and higher instruments.

08

Vacuum Pump

Equipped with a German vacuum pump that is quiet, durable and strong.



Steam Generator

It use a powerful but energy saving steam generator which provide saturated steam for fast and effective sterilization.




Solenoid Valve

High quality solenoid valve imported from Italy, better performance, reliable and extends the required maintenance period.



07

It uses a safer hook-type door locking by electric door locking with multi process system, the cycle can not be started if the door was not closed completely and also the door can not be opened when the cycle be running.



06

Imported bacteria filter, increases filtration efficiency and extend maintenance period.



01



Electronic door be opened by pressing the button. Vacuum door closed system, the door be closed properly only by pushing it softly.

02



Stainless steel reserve tank with 8.5 Liters capacity, be properly used for multiple sterilization cycles.

03



The LCD display uses a dynamic graphical appearance that can present the whole process of sterilization, including all stages of time, temperature, pressure and so on. There are 15 different kinds of languages to meet the needs of users in various countries. It also shows water shortage, locking door alarm, printer not connected alarm, and also error code to facilitate trouble shooting.

04



Optional internal printer, sterilization report can be automatically printed when each cycle end.


The device is equipped with a USB 2.0 interface, the data will be recorded automatically by a USB driver after cycle finished. Furthermore, sterilization reports for the last 20 cycles will be recorded and the user can output them at any time.

05

Pulling type drain connection, user can start and stop water drainage task once pulling or pushing it lightly. Operation is incredibly simple.



Installation Dimensions

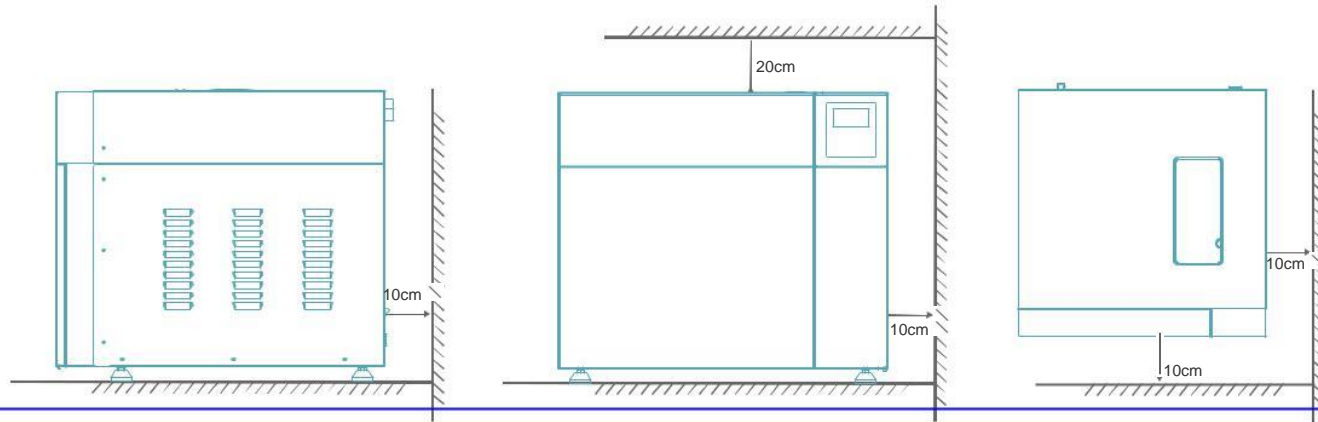


Technical Parameters

Order Code	Model Number	Chamber Dimensions	Type	Power	Weight
YR229	YR03385C (29L)	319x417	Class B	2300W(220V)	95KG
YR245	YR03385B (45L)	319x617	Class B	2300W(220V)	120KG

Default Program

Program	Temperature	Pressure	Holding Time	Total Time	T229 / T245
Solid 134°C	134°C	210Kpa	4min	25-35min	35-45min
Wrapped 134°C	134°C	210Kpa	8min	47-60min	75-95min
Wrapped 121°C	121°C	110Kpa	30min	50-65min	95-115min
Prion 134°C	134°C	210Kpa	18min	57-70min	85-105min
Liquid (Optional)	121°C	110Kpa	30min	50-70min	60-80min
Drying (Optional)	/	/	/	1-20 min	1-20min
B&D Test	134°C	210Kpa	3.5min	35-40min	55-65min
HELIX Test	134°C	210Kpa	3.5min	35-40min	55-65min
Vacuum Test	/	/	/	20-25min	28-32min

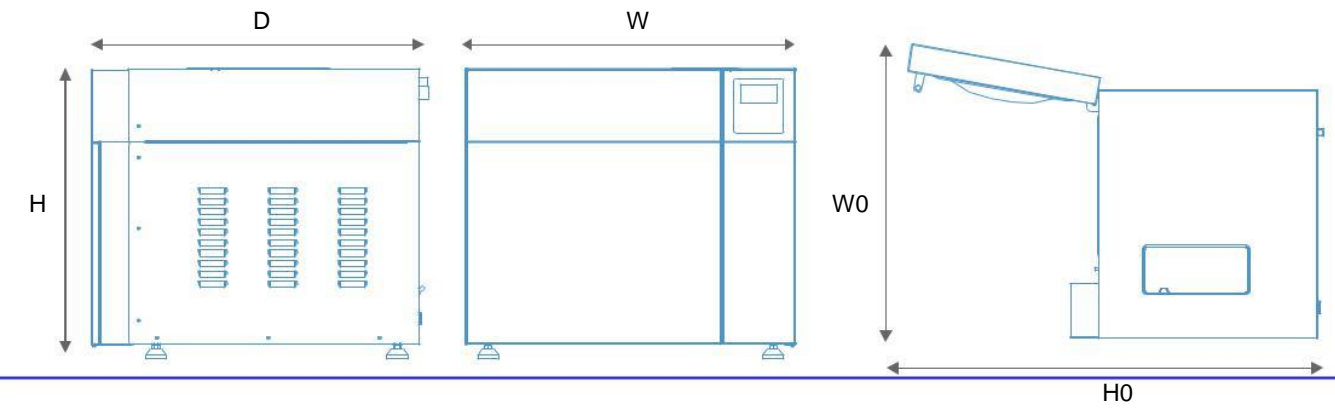

Overall Dimensions

Order Code	Width(W)	Height(H)	Depth(D)	Open Width(W0)	Open Depth(D0)
D229	640mm	560mm	640mm	760mm	1065mm
D245	640mm	560mm	840mm	760mm	1265mm

Instruments Rack

Special design racks for dental implant kits or other more bigger and higher instruments.

Order Code	Material	Width(W1)	Depth(D1)	Width(W2)	Depth(D2)	Height(H)
D229	Stainless Steel	312mm	311.5mm	222mm	311.5mm	113.5mm
D245	Stainless Steel	312mm	511.5mm	222mm	511.5mm	113.5mm

